





**MODELS 4030360/
4030360K
DOUBLE ARROW
3-36 GHZ 180° HYBRID COUPLER**

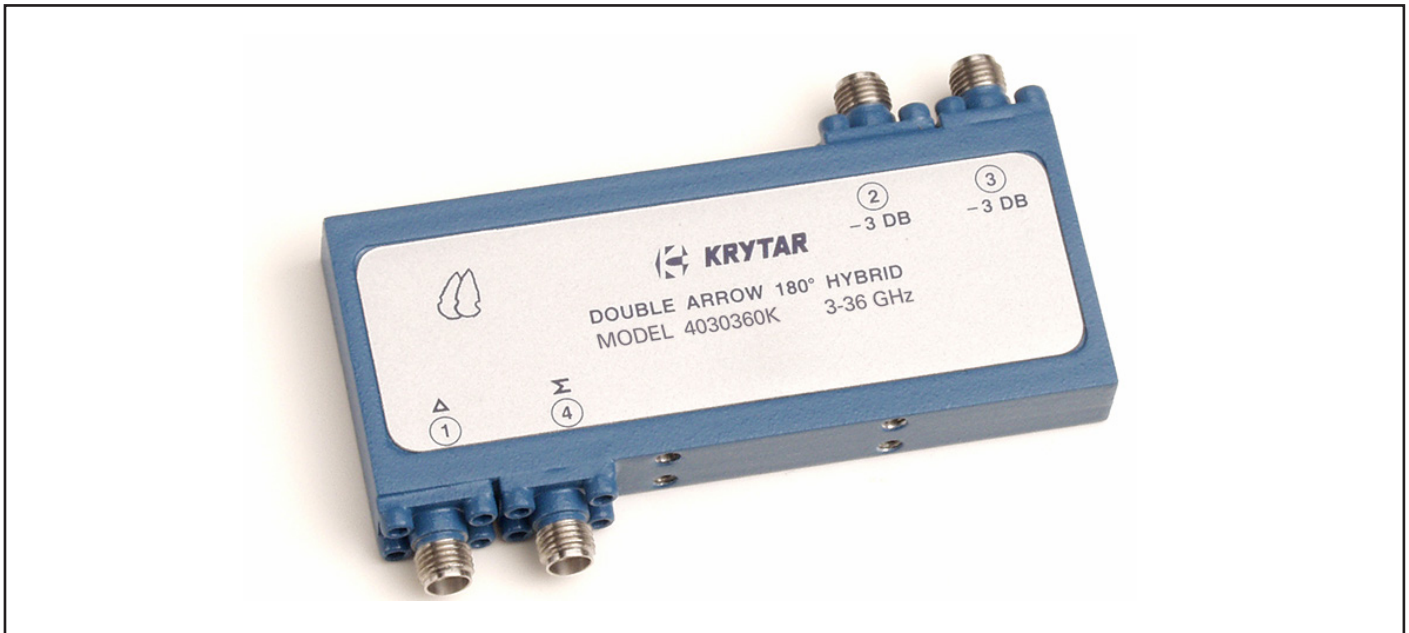

SPECIFICATIONS

FREQUENCY RANGE	3-36 GHz
COUPLING	3 dB
AMPLITUDE IMBALANCE	± 1.2 dB
PHASE IMBALANCE	± 18°
ISOLATION	> 18 dB
MAXIMUM VSWR	1.8
INSERTION LOSS	< 4.0 dB
POWER RATING	
Average	20 W
Peak	3 KW
STANDARD CONNECTORS	
4030360	2.4mm Female
4030360K	2.9mm Female
WEIGHT (ounces)	2.7
OPERATING TEMPERATURE	-54° to +85° C

DIMENSIONS IN INCHES

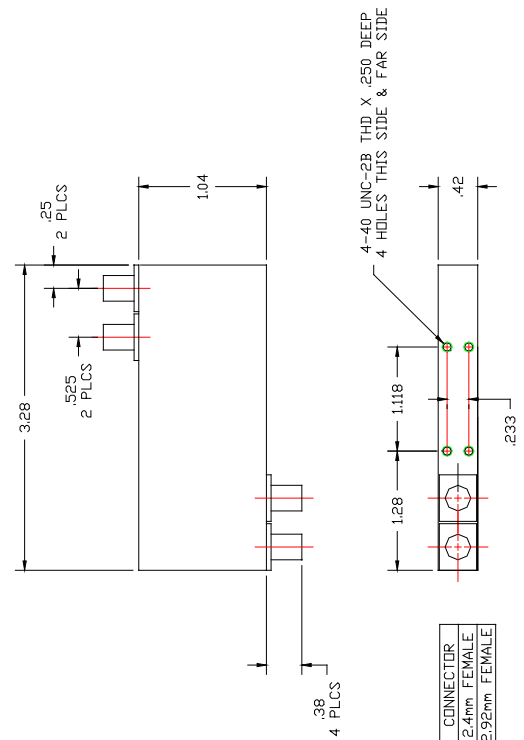

1288 Anvilwood Ave. • Sunnyvale, CA 94089 • (408) 734-5999 • FAX: (408) 734-3017
Toll Free 1 (877) 734-5999 • www.krytar.com